

## Southeastern Performance Minerals, LLC OPTIfine Muscovite Mica


### General Description

OPTIfine is a wet processed muscovite mica with a platy shape, high aspect ratio, chemical inertness, and superior color. These characteristics make OPTIfine an acceptable, cost effective additive for the following markets:

Asphalt Products	Gaskets
Asbestos Replacement	Wire & Cable
Mold Releases	Plastics
Foundry Coatings	Paints & Coatings
Adhesives	Rubber
	Cosmetics

### Typical Properties

Sieve Analysis	% retained
+100 mesh	trace
+325 mesh	<.5%
Bulk Density (Colgate)	8-12
Mean Particle Size (µm)	6.0
Color, L* value	>90
Moisture Loss @ 100°C	<1.0%
Specific Gravity	2.82
pH	6.0-7.5
CAS No.	12001-26-2

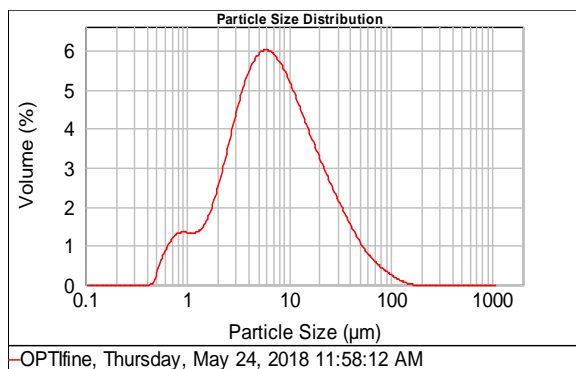

See SDS for safety and regulatory information.

Southeastern Performance Minerals, LLC  
1132 Veal Rd.  
Sandersville, GA 31082

Phone: (478)553-0048  
Fax: (478)553-0050  
info@sepm.us

The statements herein are based on data which is believed to be reliable. This data is offered in good faith and typical of normal production. SEPM make no warranty or representation, expressed or implied, regarding the accuracy of this data or the use of this product. The user is solely responsible for the use of this product.

Issue date: 6/11/15

Revised date: 6/18/18